

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
600.1095

Total Pages in this Submission
93

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

SHEET TRANSPORT SYSTEM FOR A ROTARY PRINTING PRESS

and invented by:

Hendrik FRANK

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 12 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
600.1095

Total Pages in this Submission
93

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets 3
- b. ☐ Informal Number of Sheets
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)* ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EL415729057US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
600.1095

Total Pages in this Submission
93

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*
16. ☒ Additional Enclosures *(please identify below):*

-- Letter re: Priority

Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)

17. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

Warning

An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
600.1095


Total Pages in this Submission
93

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	13	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$80.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
OTHER FEE (specify purpose) _____					\$0.00
TOTAL FILING FEE					\$710.00

- ☒ A check in the amount of **\$710.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **50-0552** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).



Signature

William C. Gehris, Reg. No. 38,156

Dated: **October 26, 2000**



CC:

23280

PATENT TRADEMARK OFFICE

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)Applicant(s): **Hendrik FRANK**

Docket No.

600.1095


Serial No.
To Be AssignedFiling Date
HerewithExaminer
To Be AssignedGroup Art Unit
To Be AssignedInvention: **SHEET TRANSPORT SYSTEM FOR A ROTARY PRINTING PRESS**

I hereby certify that this **New Utility Patent Application and Accompanying Documents**
(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on
October 26, 2000
(Date)

Randolph K. McQueen

(Typed or Printed Name of Person Mailing Correspondence)


(Signature of Person Mailing Correspondence)**EL415729057US**

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

600.1095



UNITED STATES PATENT & TRADEMARK OFFICE

Application of: Hendrik FRANK
Serial No.: To Be Assigned
Filed: Herewith
For: SHEET TRANSPORT SYSTEM FOR A ROTARY
PRINTING PRESS

LETTER RE: PRIORITY

Assistant Commissioner for Patents
Washington, D.C. 20231


October 26, 2000

Sir:

Applicant hereby claims priority from German Patent Application No. 199 51 382.1 filed
October 26, 1999.

Respectfully submitted,

DAVIDSON, DAVIDSON & KAPPEL, LLC

By 
William C. Gehris
Reg. No. 38,156

Davidson, Davidson & Kappel, LLC
1140 Avenue of the Americas, 15th Floor
New York, New York 10036
(212) 997-1028

"Express Mail" mailing label no. EL415729057US

Date of Deposit: October 26, 2000.

I hereby certify that this correspondence and/or documents referred to as
attached therein and/or fee are being deposited with the United States Postal
Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10
on the date indicated above, in an envelope addressed to: "Assistant Commissioner
for Patents, Washington, D.C. 20231".

DAVIDSON, DAVIDSON & KAPPEL, LLC

By: 
Randolph K. McQueen

SHEET TRANSPORT SYSTEM FOR A ROTARY PRINTING PRESS

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a sheet transport system for a rotary printing press having rails configured on both sides of a sheet transport path, driven grippers being guided on these rails for pulling a sheet to be conveyed in the feed direction.

German Patent Application No. DE 4 302 125 A1 discloses a sheet transport system, where sheet grippers grip the side edges of a pre-printed sheet at a rear sheet section, viewed in the feed direction. These lateral grippers are used in cooperation with grippers which are configured on a gripper bar and which hold the front sheet edge, viewed in the feed direction, to prevent the sheet from fluttering and, thus, from colliding with parts of the printing press, thereby avoiding any blurring of the ink freshly printed thereon. These lateral sheet grippers do not execute their own driving function. Rather, they exert a force on the sheet opposite to the feed direction to ensure that the sheet is held tightly.

Since the intended use of the lateral sheet grippers of this known transport system is to protect factory-printed sheets, there is no reason to consider using them in a sheet transport system at any location other than behind the printing unit, viewed in the feed direction.

German Patent Document No. DE-OS 2 501 963 discloses another sheet transport system for a rotary press, having rails arranged on both sides of a sheet transport path. The rails have a cross bar mounted thereon, which in turn has grippers mounted thereon for gripping a front edge, viewed in the feed direction, of a sheet to be printed. With the aid of the gripper mounted thereon, this cross bar pulls a sheet to be printed through a nip between an impression cylinder and a blanket cylinder. On their peripheral surface, both cylinders have a channel-type segment, which is sized to accommodate the cross bar, including the grippers mounted

thereon, as it moves through the gap.

In the case of this transport system, precise synchronization of the motion of the cylinder and cross bar is extremely important. A synchronization error can cause the cross bar and cylinder to collide in a position of the cylinder where the cross bar is not able to mate or fully mate with the channels. The result is that the cross bar becomes jammed, which can lead to considerable damage to the cross bar and to the cylinders, and possibly to their mount fixtures and driving devices as well.

One cannot obviate the danger of such collisions safely enough simply by electronically synchronizing the motion of the transport system and of the cylinders. Satisfactory operational reliability can only be achieved by a mechanical forced coupling of the parts that dip into one another, for example with the aid of gearing and/or by using a mainshaft.

A further drawback of transporting sheets using a cross bar that dips into the gap between the blanket cylinder and the impression cylinder is that the rotation of the cylinders excites vibrations in the printing press. When ink is transferred onto a sheet to be printed, the blanket cylinder and impression cylinder are pressed against each other; when the channels mutually oppose each other, such pressing does not occur. The result is a dynamic excitation of vibrations in the printing press. Since the natural frequencies of printing presses are often near their maximum rotational speeds, it is precisely this intense vibrational excitation that limits any further increase in productivity.

An additional consequence of this vibrational excitation is that the contact pressures between the impression cylinder and blanket cylinder are limited. This, in turn, limits the use of stamping dies, for example.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a sheet transport system for a printing press that can be run with a high level of operational reliability, at high pressures and high speeds. This is achieved by a sheet transport system having rails which are arranged on both sides of a sheet transport path and in which driven grippers are guided for pulling a sheet to be transported in the feed direction, in that the grippers engage with side edges of the sheet near its front end, viewed in the feed

direction. This measure completely eliminates the need for a cross bar and for grippers mounted thereon for pulling the sheet at its front edge. The result, of course, is that the danger of collision between the cross bar and the cylinders is eliminated.

5 At the same time, the channels on the blanket cylinders and printing cylinders can be completely eliminated or reduced to the extent that is essential for securing the blanket or the printing plate to these cylinders. In any case, reducing the channels lessens vibrational excitation, thereby permitting higher rotational speeds and enhancing productivity for the printing press.

10 A sheet transport system of this kind can run continuously between a feeder and a delivery device of the rotary press. The need is eliminated for transferring a sheet to be printed between various gripper devices while the sheet is fed through the press. Consequently, even print positioning errors resulting from errors when transferring the sheet among various gripper devices are ruled out.

15 Since there is no longer a danger of the grippers and cylinders of the printing press colliding, all that is needed to synchronize the motion of the grippers with that of the cylinders is an electronic control circuit.

 Since the cross bar for coupling grippers holding a same sheet is eliminated, the control circuit can also be effectively used to synchronize these grippers.

20 Another gripper pair can be run on the rails to grip a lagging sheet end. This gripper pair is preferably braked in order to keep the held sheet securely taut.

 The grippers of the sheet transport system preferably each have two clamping jaws, magnets being configured at opposite ends of the rails, viewed in the feed direction, to open the clamping jaws by magnetic force, enabling them to clamp
25 a sheet to be printed at a pick-up device and release it again at a delivery device. The clamping jaws can be squeezed together in simple fashion by a spring element.

 To facilitate a simple pick-up and release of the sheets, it is expedient for the rails to diverge at their ends transversely to the feed direction, in the plane of the transported sheet.

30 Although the present invention relates to a sheet transport system for a rotary printing press and the practical embodiments in the following likewise concern a rotary printing press, the principle underlying the present invention that the grippers

engage with side edges of the sheet near its front end, viewed in the feed direction, can also be applied to other processing machines used for flat products. These could include, in particular, all types of copying machines, such as printers based on the principle of toner printing.

5

BRIEF DESCRIPTION OF THE INVENTION

Other features and advantages of the present invention are derived from the following description of exemplary embodiments, reference being made to the figures, in which:

10 Figure 1 shows a substantially schematized section through a portion of a printing press having a sheet transport system in accordance with the present invention;

 Figure 2 shows a plan view of the transport system having a sheet guided between two grippers;

15 Figure 3 shows a side view of a gripper in a first refinement;

 Figure 4 shows a schematic plan view of the feeder area of a printing press having a sheet transport system in accordance with the present invention;

 Figure 5 shows a section through the feeder of Figure 4, along line V-V;

20 Figure 6 shows a detail of the feeder of Figure 4, in a section along line VI-VI; and

 Figure 7 shows a side view of a gripper in accordance with a second variant.

DETAILED DESCRIPTION

25 In the print unit of a rotary sheet-fed printing press schematically depicted in Figure 1, cylinders 50, 51 represent a printing cylinder and a blanket cylinder, respectively, between which a sheet to be printed is guided. A sheet transport system 1 includes two guide rails 6a, 6b, disposed one behind the other, normal to the drawing plane, in which driving elements 10 constructed of individual chain links of magnetizable material are run, and drive stations 8 configured above and below guide rails 6a, 6b are driven. Drive stations 8 each include electromagnetic coils, which are selectively excited by a control circuit 30 to regulate the forward motion of individual driving elements 10 in each rail 6a, 6b.

30

Figure 2 is a detailed illustration of the sheet transport system. It corresponds to a partial section through the upper of the two cylinders 50 along line II-II in Figure 1 and, respectively, to a plan view of lower cylinder 51, including a sheet 2 guided over it.

5 Sheet transport system 1 includes two guide rails 6a, 6b, which extend in the figure to the right and left of cylinders 50, 51. Components in the two guide rails are differentiated in the following by the letters a and b, respectively, depending on whether they belong to the right or left rail.

10 Guided, respectively, in rail 6a and 6b, depicted in section, are driving elements 10a and 10b, which comprise a plurality of chain links 12a, 12b articulated by joints 24a, 24b that are rotatable about an axis normal to the drawing plane. The length of driving elements 10a, 10b is selected so that each driving element is always subject to the magnetic force of at least one of drive stations 8a, 8b, arranged at uniform distances on the rails. One of chain links 12a, 12b of each drive element
15 supports a gripper 20a, 20b, which, through a longitudinal slot 7 (see Figure 5) of guide rail 6a and 6b, respectively, meshes with the interspace between the two rails. Grippers 20a, 20b hold sheet 2 in each case on a longitudinal edge near its front transverse edge, viewed in the feed direction. The width of sheet 2 is slightly greater than the active width of cylinders 50, 51, and grippers 20a, 20b hold sheet 2 on an
20 area of the sheet that extends beyond the width of cylinders 50, 51, in the direction of guide rails 6a and 6b, respectively. This rules out any chance of grippers 20a, 20b coming in contact with the surfaces of cylinders 50, 51. In the event that an error occurs when the movements of drive elements 10a, 10b and of cylinders 50, 51 are electronically synchronized by control circuit 30, at most, this can result in the
25 image to be printed by the cylinders on sheet 2 being incorrectly positioned, but not in any danger whatsoever of damage. No provision is made for a mechanical coupling of grippers 20a, 20b, as provided, for instance, by the cross bar known from the German Patent Document No. 2 501 963. The synchronization of the motion of drive elements 10a, 10b required to evenly guide sheet 2 is achieved in
30 that control circuit 30 drives each of the mutually opposing drive stations 8a and 8b, respectively, of the two rails in the same way. Here as well, the need is eliminated for a mechanical forced coupling of the two grippers 20a, 20b, without this leading

to a loss of operational reliability of the transport system, i.e., of a printing press equipped with the transport system. This is due to the fact that in the case of the transport system according to the present invention, any lack of synchronicity in the movement of two grippers holding a same sheet can lead to the sheet to be transported tearing, not, however, to a canting of the transport system and, thus, also not to mechanical damage to this or other parts of the printing press.

Figure 3 depicts a view of gripper 20b of Figure 2, viewed from the direction of arrow III in Figure 2. The gripper is designed as a type of clamp, having two jaws 21, 22, articulated at a joint 25 and, at their mutually facing inner sides, bearing retaining members 23, whose material contacts the material of the sheet with a high coefficient of friction. In the normal transport state of the gripper shown in the figure, a tension spring 26 keeps the two jaws 21, 22 pressed against one another. An arm 27 is used to secure the gripper in one of links 12a, 12b of drive element 10. Upper jaw 21 of the gripper that is able to swing via joint 25 toward arm 27 is at least partially made of a magnetic, preferably soft magnetic material, as are chain links 12a, 12b.

Figure 4 shows a plan or top view of a feeder region of the sheet transport system according to the present invention. The same feeder region is illustrated in section, in Figure 5, along line V-V of Figure 4. A sheet pile 40 is arranged at the pick-up edge of a feeding table 41 and kept at a level where top-most sheet 2 of the pile 40 can be slid by a separating device (not shown) onto feeding table 41 into the position shown in Figures 4 and 5.

Guide rails 6a, 6b each form a closed circuit in which grippers 20a, 20b circulate in pairs, synchronously in the direction of arrows 42. The circuit includes an intake section 4a, 4b in the vicinity of the pick-up edge of feeding table 41, in which rails 6a, 6b run toward each other in the transport plane of sheet 2, and contiguous thereto, a transport section, where they run in parallel. In intake section 4a, 4b, grippers 20a, 20b pass through underneath magnets 43a, 43b mounted above rails 6a, 6b, the magnets exerting a force of attraction on upper jaw 21 of each gripper, lifting it opposite the force of tension spring 26. Thus, when passing through underneath magnets 43a, 43b, the grippers are in an open position or setting. In this position, they approach the sheet to be transported, from the side, to the point

where side edges 3 of the sheet engage between jaws 21, 22. Typically, the depth of engagement can amount to 5 to 10 mm.

The separating device places sheet 2 with its front edge, viewed in the feed direction, disposed more or less at the level of the rear ends of magnets 43a, 43b. At this location, grippers 20a, 20b leave the field of magnets 43a, 43b, so that their jaws close, grasp side edges 3 of sheet 2, and transport sheet 2 away from the illustrated position.

Figure 4 depicts a pair of grippers 20a, 20b, at the moment when they close at the level of the front edge of sheet 2.

Two sensors 44a, 44b are flush-mounted transversely to the feed direction of sheet 2, spaced apart from one another in the surface of feeding table 41. These sensors detect the instant when they are crossed over by a sheet that is grasped by one of grippers 20a, 20b and being carried away from the position shown in Figure 4. This detection makes it possible for control circuit 30 to precisely determine the position of sheet 2 in relation to the printing press, independently of how the sheet had been grabbed by grippers 20a, 20b. This is useful, since the position of the sheet in relation to a gripper can fluctuate to a certain extent from one feed operation to the next. The control on the basis of the detection results of sensors 44a, 44b makes it possible, on the one hand, to compensate for any skewing of sheet 2, in that the two grippers 20a, 20b holding sheet 2 are driven in slight variation, and, on the other hand, to synchronize the position of the front edge of sheet 2 precisely with the motion of printing cylinders 50, 51, for example a blanket cylinder and an impression cylinder.

To run a sheet through the printing press, it suffices, in principle, when the sheet is gripped at its front edge and pulled through the press. However, for a precise, balanced guidance of the sheet, it is desirable for it to be held at more than one location along its longitudinal edges. This can be easily done using the transport system according to the present invention, since the individual drive elements 10a, 10b are not coupled to one another and, in general, are able to be driven, independently of one another, by the individual drive stations 8a, 8b. Control circuit 30 can drive the drive stations in such a way that, in each case, two successive grippers circulate at such a distance along guide rails 6a, 6b that a first gripper

receives a sheet to grasp near its front edge, and a following gripper grasps it at a location disposed further behind, preferably at the level of its rear edge. Applying a slightly greater driving force to the front gripper than to the gripper that follows enables the sheet to be conveyed through the printing press, stretched tightly (taut) under a substantially arbitrarily selectable initial tension.

The feeding table of Figure 4 has a central bearing surface 45 and in each case, between bearing surface 45 and guide rails 6a, 6b, deep-set channels 46a, 46b for receiving lower jaws 22 of grippers 20a, 20b during their feed motion. To prevent the side edges of one sheet having little inherent rigidity from hanging down into these channels 46a, 46b before they can be grasped by grippers 20a, 20b, it is useful to provide air vents 47 at the base of these channels, in particular below magnets 43a, 43b, to release a dosed air flow to hold the edges of sheet 2 at a level where they can be grasped by grippers 20a, 20b.

In a cross-section along line VI-VI of Figure 4, Figure 6 shows a preferred arrangement of air vents 47 on an enlarged scale. Here, air vent 47 extends diagonally below bearing surface 45 of feeding table 41, and is open at a side wall 48 of channel 46a. An air flow emerging from the air vent in the direction of arrow 49 lifts side edge 3 of sheet 2 out of the position shown with a solid line into a position shown with a dotted line, where it essentially comes into alignment with the part of sheet 2 resting on bearing surface 45. At the same time, the air flow exerts a tensile force in the lateral direction, on side edge 3, stretching the sheet transversely to its feed direction. With this measure, even sheets 2 having little intrinsic rigidity are able to be securely grasped by grippers 20a, 20b, without the danger of side edge 3 colliding with lower jaw 22 of a gripper and buckling in the process.

Figure 7 depicts a second variant of a gripper. Parts which correspond to those of the gripper of Figure 3 bear the same reference numerals and are not described once more. In place of a tension spring, a pressure spring 28 is provided, which is arranged between arm 27 and an extension prolongation of upper jaw 21. A force 29 acting from above on the extension prolongation allows the gripper to open. A gripper of this kind can be used, for example, in a transport system having a feeder similar to that of Figures 4 and 5, magnets 43a, 43b being replaced by pressure profiles underneath which the extension prolongation slides along and

which press down the extension prolongation, while the gripper moves from the side toward the side edges of a sheet to be grasped.

Provision is made in each case at the distributor of the sheet transport system at guide rails 6a, 6b for an outlet region or delivery end region, which is designed analogously to the intake region 4a, 4b. There, other magnets or pressure profiles, are provided for opening the grippers and for releasing the printed sheet on a storage pile. The opened grippers 20a, 20 move away from one another on the rails 6a, 6b, which diverge in the outlet section, and are transported back to intake region 4a and 4b, respectively.

“Gripped near the front end” as defined herein is defined to mean that the paper is gripped at least between the front end of the sheet and a halfway point between the front end of the sheet and the rear end of the sheet so that the sheet can pass operatively through the printing press without error due to the drooping or bending of the front end.

Variable	Mean	SD	Min	Max
Age	35.2	12.5	18	65
Gender	Male	10.5	0	20
Marital Status	Married	15.2	0	25
Education	High School	12.5	0	20
Occupation	Unemployed	18.5	0	25
Income	\$15,000	10,000	0	40,000
Health Status	Good	10.5	0	20
Smoking Status	Non-smoker	12.5	0	20
Alcohol Consumption	Low	10.5	0	20
Exercise Frequency	Low	10.5	0	20
Stress Level	Low	10.5	0	20
Depression Score	Low	10.5	0	20
Life Satisfaction	Low	10.5	0	20
Overall Health	Low	10.5	0	20
Quality of Life	Low	10.5	0	20
Physical Health	Low	10.5	0	20
Mental Health	Low	10.5	0	20
Social Health	Low	10.5	0	20
Emotional Health	Low	10.5	0	20
Behavioral Health	Low	10.5	0	20
Environmental Health	Low	10.5	0	20
Healthcare Access	Low	10.5	0	20
Health Insurance	Low	10.5	0	20
Healthcare Costs	Low	10.5	0	20
Healthcare Quality	Low	10.5	0	20
Healthcare Satisfaction	Low	10.5	0	20
Healthcare Access	Low	10.5	0	20
Health Insurance	Low	10.5	0	20
Healthcare Costs	Low	10.5	0	20
Healthcare Quality	Low	10.5	0	20
Healthcare Satisfaction	Low	10.5	0	20

5

driven grippers being guided on the rails for pulling a sheet to be conveyed in a feed direction, the sheet having side edges and a front end with respect to the feed direction, the grippers engaging the side edges of the sheet near the front end.

10

15

20

25

7. The sheet transport system as recited in claim 6 wherein the lagging gripper pair is braked.

30

magnetic force.

9. The sheet transport system as recited in claim 8 wherein the clamping jaws are forced together by a spring element.

5

10. The sheet transport system as recited in claim 1 wherein the rails diverge at at least one of at an intake area and an outlet area transversely to the feed direction, in a plane of the transported sheet.

10

11. The sheet transport system as recited in claim 1 wherein the grippers hold the sheet in an area of the sheet that extends beyond the width of the cylinders of the rotary printing press.

15

12. A method for transporting a sheet having a front edge and a first side edge and a second side edge in a rotary printing press comprising:
gripping the first side edge near the front edge with a first gripper;
gripping the second side edge near the front edge with a second gripper; and
moving the first and second grippers on rails configured on both sides of a sheet transport path so as to move the sheet along the sheet transport path.

20

13. The method as recited in claim 12 further comprising gripping the first side edge at a rear of the sheet with a third gripper.


Abstract




A sheet transport system for a rotary press having rails (6a, 6b) configured on both sides of a sheet transport path, driven grippers (20a, 20b) gripping a sheet (2) to be transported near its front end, viewed in the feed direction, at its side edges and pulling it through the rotary press.

5

Fig. 1

Fig.2

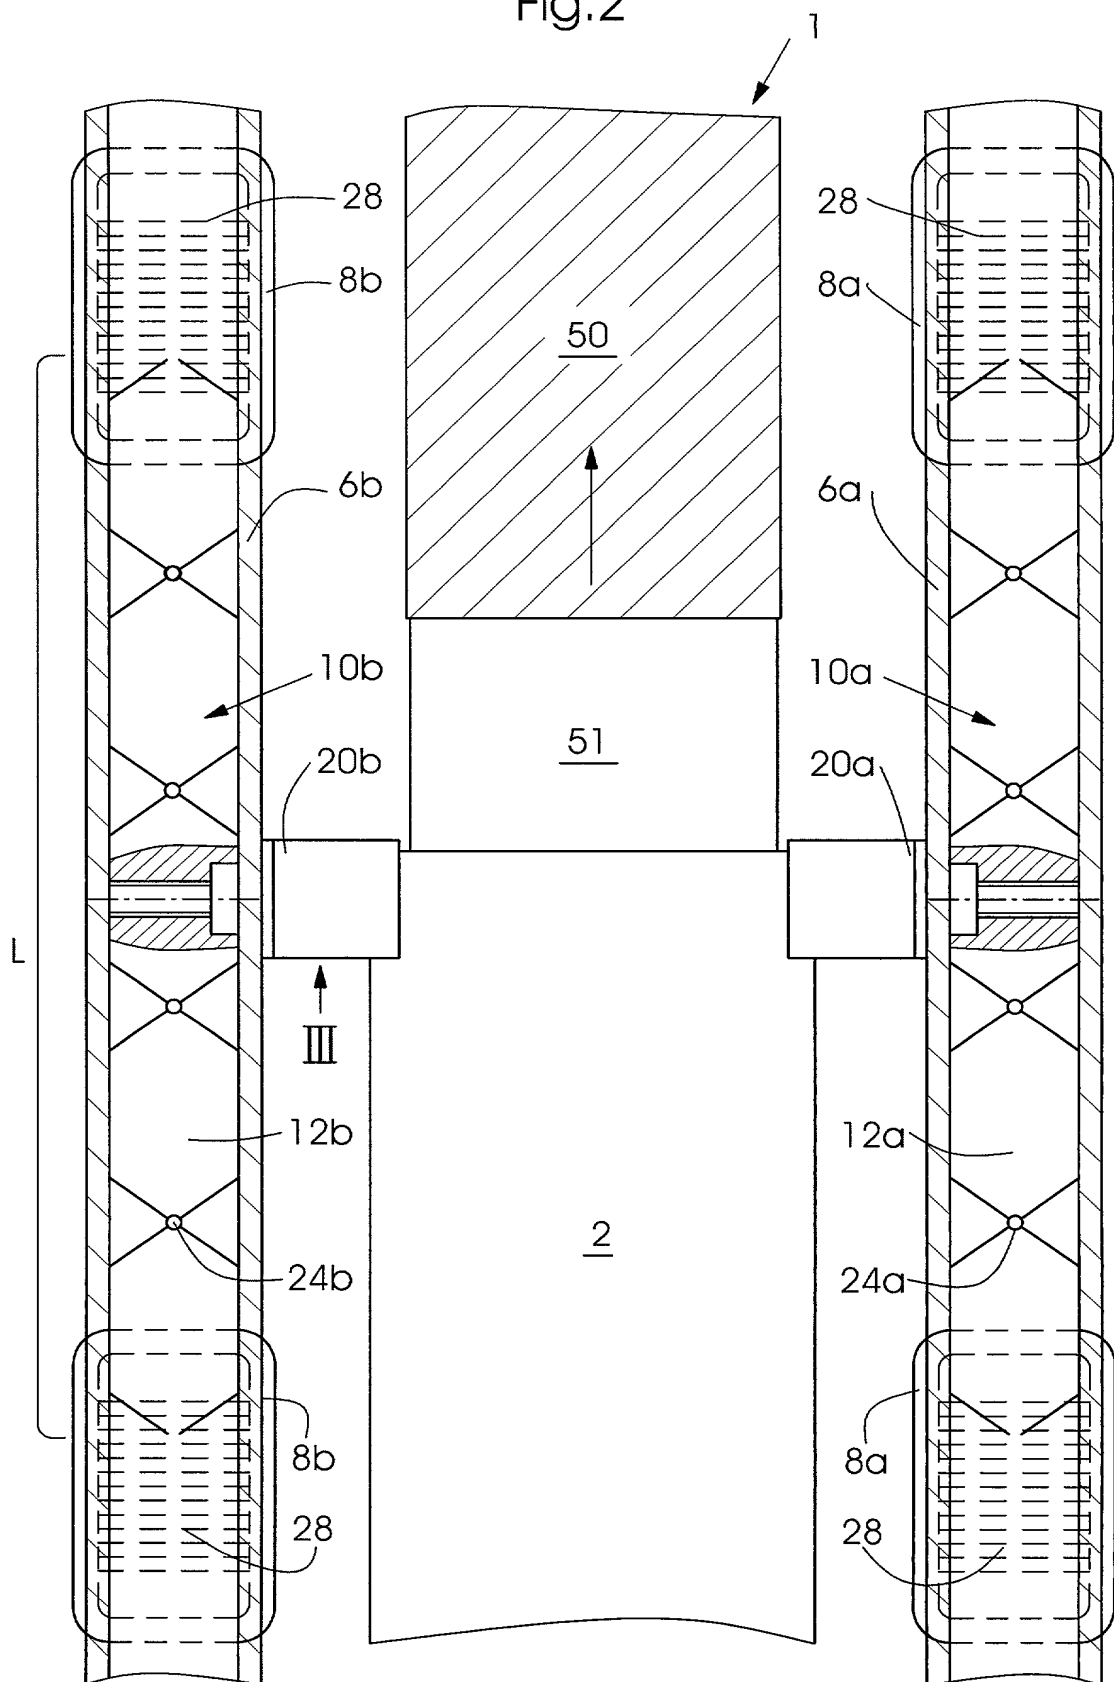

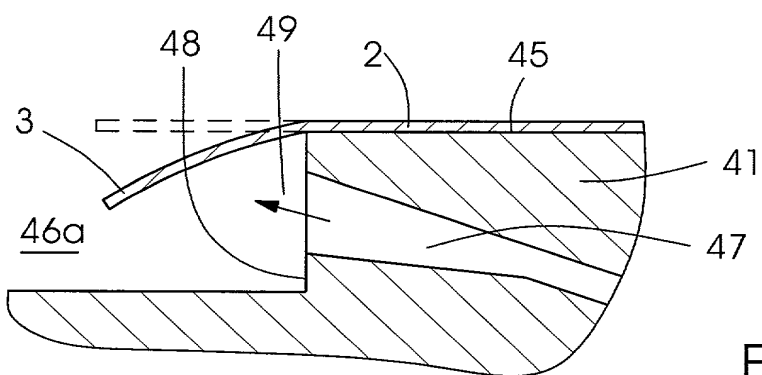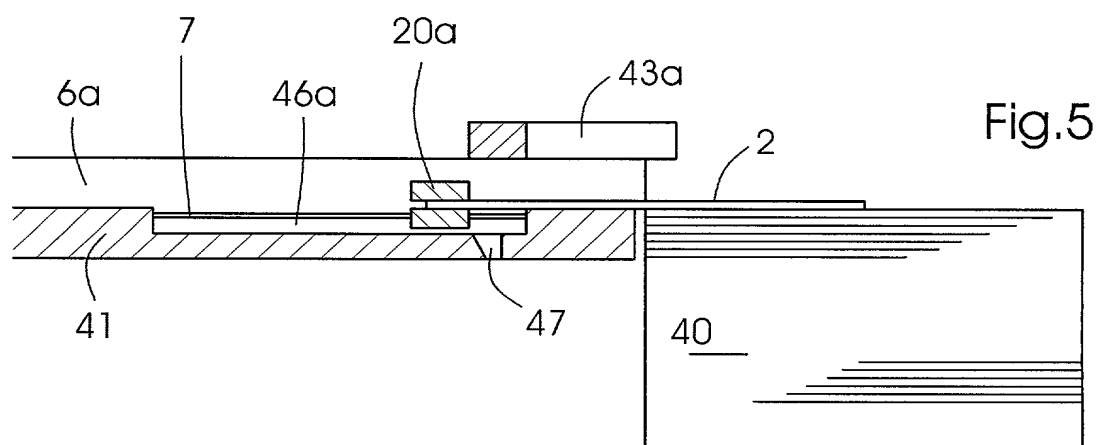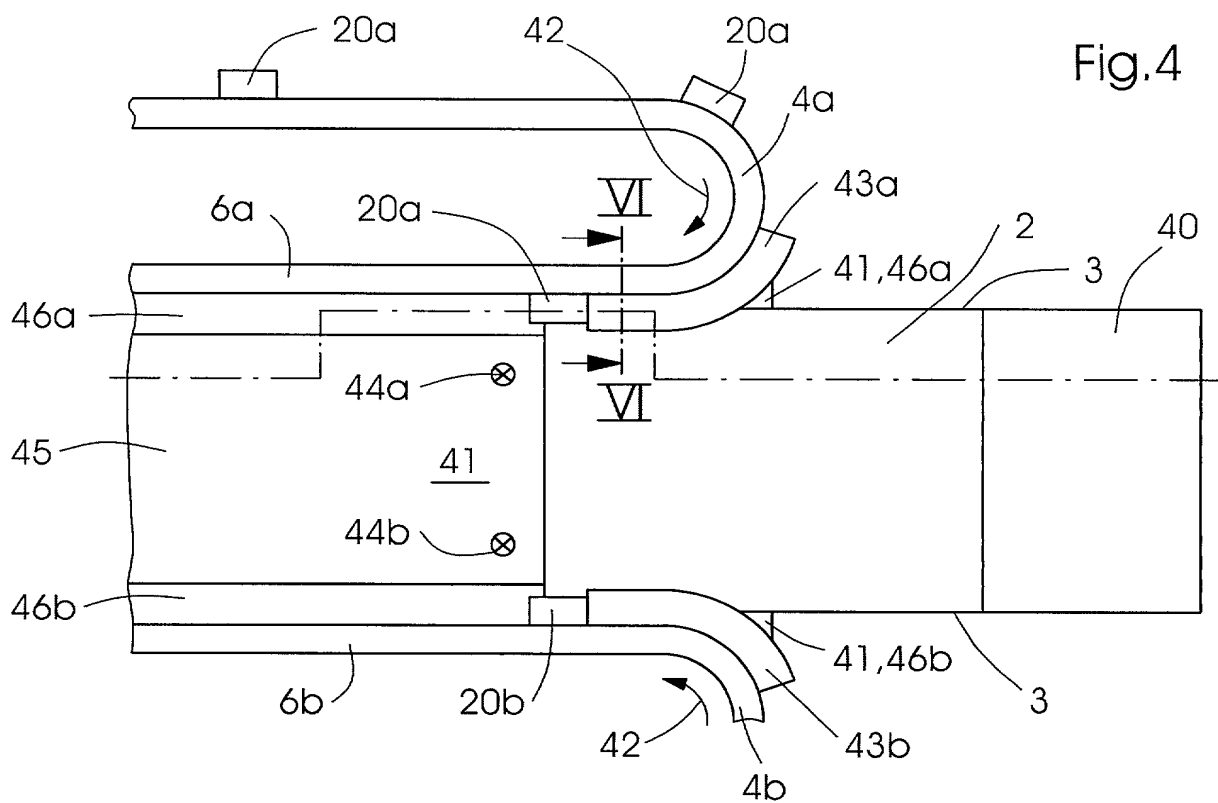

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **SHEET TRANSPORT SYSTEM FOR A ROTARY PRINTING PRESS** the specification of which (check one)

X is attached hereto
 was filed on _____ as Application Serial No. _____
 and was amended on _____ (if applicable).
X I hereby authorize and request our attorney, Davidson, Davidson & Kappel, LLC. of 1140 Avenue of the Americas, New York, New York 10036 to insert here in parentheses (Application number _____, filed _____) the filing date and application number of said application when known.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is known to me to be material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign and/or provisional application(s) for patent or inventor's certificate listed below and have also identified below any foreign and/or provisional application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

PRIOR APPLICATION(S)			Priority claimed
<u>199 51 382.1</u>	<u>Germany</u>	<u>26 October 1999</u>	<u>X</u>
(Number)	(Country)	(Day/Month/Year Filed)	Yes No
_____	_____	_____	Yes No
(Number)	(Country)	(Day/Month/Year Filed)	Yes No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial Number)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial Number)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

And I hereby appoint Clifford M. Davidson, Registration No. 32,728, Leslye B. Davidson, Registration No. 38,854, Cary S. Kappel, Registration No. 36,561, William C. Gehris, Registration No. 38,156, Morey B. Wildes, Registration No. 36,968, Robert J. Paradiso, Registration No. 41,240, Scott L. Appelbaum, Registration No. 41,587, Cynthia R. Moore, Registration No. 46,086, David Knasiak, Registration No. 45,991, Salvatore J. Maiorino, Registration No. 42,830, my attorneys, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith; correspondence address: DAVIDSON, DAVIDSON & KAPPEL, LLC, 1140 Avenue of the Americas, 15th Floor, New York, New York 10036; Telephone: (212) 997-1028; Fax: (212) 997-1037.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first
 Inventor Hendrik FRANK
 Inventor's signature _____
 Date _____
 Residence Heidelberg, Germany
 Citizenship German
 Post Office Address: Rohrbacher Str. 20
69115 Heidelberg, Germany

Full name of joint
 Inventor, if any _____
 Second Inventor's signature _____
 Date _____
 Residence _____
 Citizenship _____
 Post Office Address: _____

Full name of joint
 Inventor, if any _____
 Third Inventor's signature _____
 Date _____
 Residence _____
 Citizenship _____
 Post Office Address: _____

Full name of joint
 Inventor, if any _____
 Fourth Inventor's signature _____
 Date _____
 Residence _____
 Citizenship _____
 Post Office Address: _____